

230V

TS970

DOOR CONTROL PANEL OWNER'S MANUAL

PerforMax Industrial Doors
5 Crozerville Road, Aston, PA 19014
+1 (484) 840-8500

WWW.PERFORMAXGLOBAL.COM
INFO@PERFORMAXGLOBAL.COM

Additional Information for Australian Installations

OPERATING INSTRUCTIONS

Car Park Function - Self Hold Open / Self Hold CLOSE

Please consider the following in order to achieve automatic closing of your door;

GfA recommends Safety Edge Installation for self closing doors. Our controller monitors a functional Safety Edge and will only permit automatic closing if the controller receives a valid test signal from the safety edge sensor.

If the door supplier decides to operate the door with an alternative safety device (i.e. photo beam), then an end of line resistor (8K2) has to be connected between the controller terminals 2.3 and 2.4.



Note!

- Do not connect the end of line resistor without a suitable safety device to protect people and goods from damage when the door is automatically closing!

Connection of Photo Electric Beams

A number of devices can be connected to the logic controller. The Photo Beam switching contact should be connected to terminals X6 (6.1, 6.2).

Connection Loop Detector

The loop detector should be connected to the terminals 5.2 & 5.3 (N/O).

Contents

1	General safety information	7
2	Technical data	8
3	Mechanical installation	9
4	Electrical installation	10
	Connection cable connection overview	11
	Carrying out the electrical installation.....	12
	Mains connection	13
	Mains connection to control.....	13
	Completing the electrical installation	13
	MaxSpeed Model Adjustments	13
	Overview of control.....	14
	Wiring Guide.....	14
5	Starting up the control	15
	DES: Rapid adjustment of final limit positions	15
	NES: Rapid adjustment of final limit positions	16
6	Electrical installation – control accessories	17
	X1 External supply	17
	X3 Emergency stop	17
	X4 Automatic closing On/Off	17
	X5 Control device	17
	X6 Photo cell	18
	X6 Light curtain	18
	X7 Radio receiver.....	18
	X7 Pull switch.....	18
	X8 Intermediate open	18
	X20 Relay contact	18
	Spiral cable connection	19
	Completing the electrical installation	20
7	Control programming	21
8	Table of menu items	22
	Operating mode	22
	Door positions	23
	Door functions	24
	Safety functions.....	27

DU / FI settings	28
Maintenance cycle counter	29
Readout information store	30
Clear all settings.....	30
9 Safety devices	31
X2: Input, door safety switch	31
X2: Input, safety edge system	32
X3: Input, emergency stop	34
10 Functional description	35
X: 24 V DC voltage supply	35
X1: Mains supply line for control and external supply	35
X4: Input, automatic closing Off/On.....	36
X5: Control device	36
X6: Input, through / reflective photo cell or light curtain.....	37
X7: Input, pull switch/radio receiver.....	40
X8: Input, intermediate open On/Off.....	41
X20: Potential-free relay contact	42
Force monitoring (DES only)	42
Travel time monitoring (NES only)	43
UBS system	44
UBS connection	44
Reversing duration adjustment	44
Maintenance cycle counter	45
Short-circuit/overload display	45
Standby function	45
11 Status display	46
12 Explanation of symbols	53
13 Declaration of Incorporation/Declaration of Conformity	55

Symbols



Warning - Risk of injury or danger to life!



Warning - Danger to life from electric shock!



Note - Important information!



Prompt - Required action!

Illustrations show example products. Differences from the delivered product are possible.

1 General safety information

Intended use

The door control is intended for a power-operated door with drive unit (NES/DES limit switch system from).

Safe operation is only guaranteed with specified normal use. The drive unit is to be protected from rain, moisture and aggressive ambient conditions. No liability for damage by other applications or non-observance of the instructions.

Modifications are only permitted with the agreement of the manufacturer. Otherwise it will void the manufacturer's declaration.

Safety information

Installation and initial start-up by skilled personnel only.

Only authorised persons are permitted to work on electrical systems. They must assess the work given to them, recognise potential danger zones and be able to take appropriate safety measures.

Only carry out installation work when the supply has been switched off.

Observe the applicable regulations and standards.

Coverings and protective devices

Only operate with appropriate coverings and protective devices.

Ensure that gaskets are fitted correctly and that all cable glands are tightened.

Spare parts

Only use original spare parts.

2 Technical data

Series	TS 970	
Dimensions W x H x D	155 x 386 x 90	mm
Installation	vertical	
Vibration	free of vibration Installation	
Operating frequency	50/60	Hz
Supply voltage	1 N~220 V, PE 3 N~220-400 V, PE 3~220-400 V, PE	
Output power for drive unit, maximum	3	kW
Protection per phase, on-site	10-16	A
External supply voltage: (internal electronic protection)	24	V DC
	0.18	A
External supply voltage: X1/L, X1/N (protection via F1 micro-fuse)	1 N~230 V	
	1.6	A time-lag
Control inputs	24	V DC
	type 10	mA
Type of relay contact	potential-free changeover contact	
Loading of relay contacts, ohmic/inductive	230	V AC
	1	A
Control power consumption	10	VA
Temperature range	Operation: -10..+50 Storage: +0..+50	°C
Humidity	to 93 % non-condensing	
Protection class of housing	IP65	
Compatible limit switch	NES; DES	

3 Mechanical installation



Control installation!


- Indoor use only
- Mount on a level ground free of vibration
- Only mount in the vertical position
- Door must be in clear view from place of assembly

Requirements

The permissible loads on walls, mountings, connection and transmission elements must not be exceeded.

Mounting

The control is mounted via 4 elongated holes

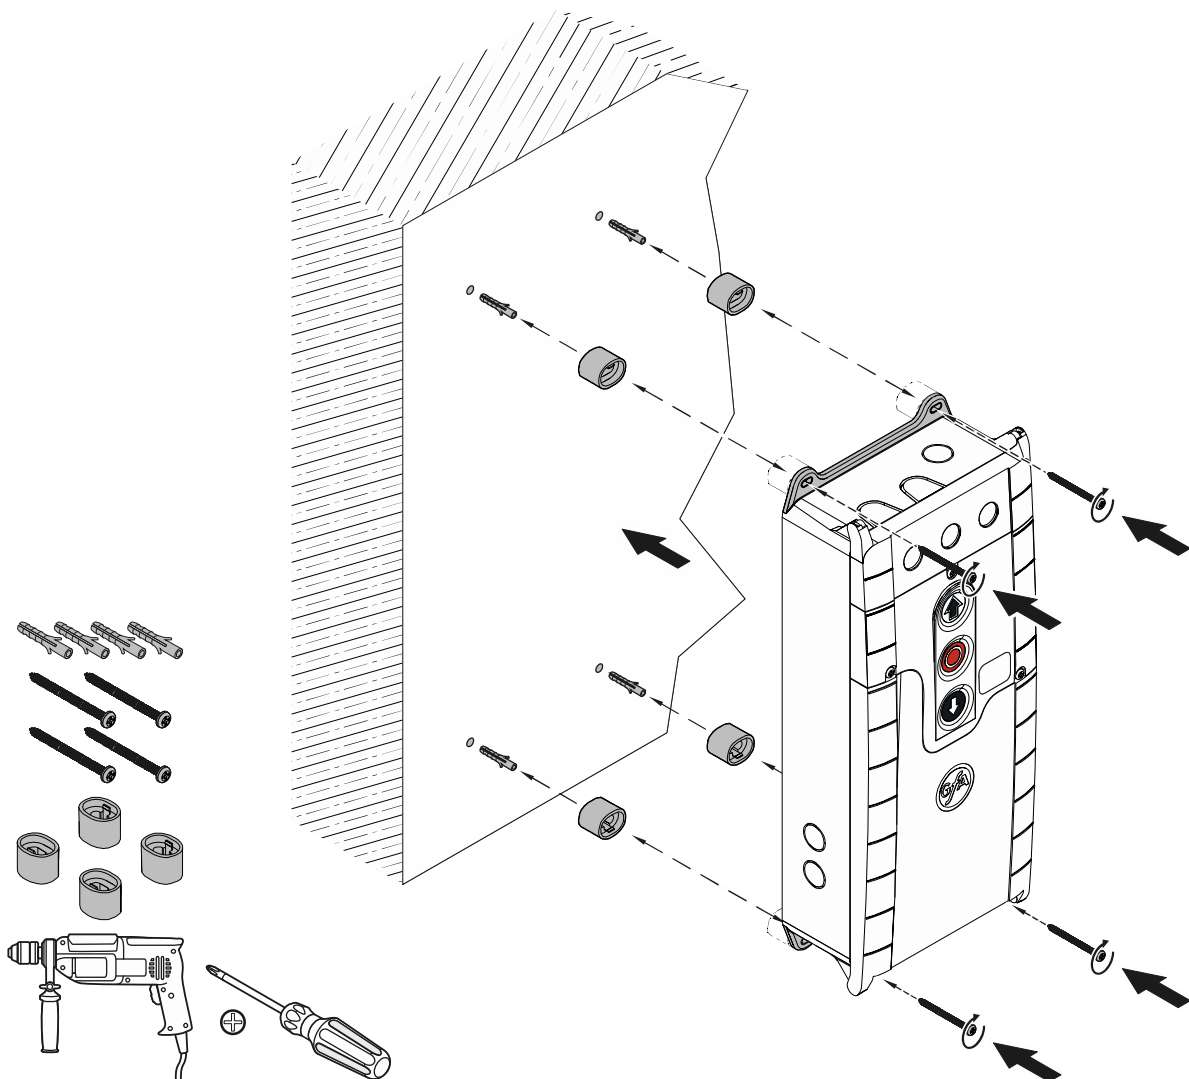

4 Electrical installation



Warning - Danger to life from electric shock!

- Disconnect the cables (mains OFF) and check that the supply is off
- Observe the applicable regulations and standards
- Ensure proper electrical connection
- Use suitable tools




On-site backup fuse and disconnecter unit!

- Only use current sensitive earth leakage circuit breakers type B for FI-drive units
- Connection to the indoor installation via an all-pole disconnecter unit, with current ≥ 10 A as per EN 12453 (e.g. CEE plug connector, main switch)



Read the drive unit installation instructions!

Connection cable connection overview

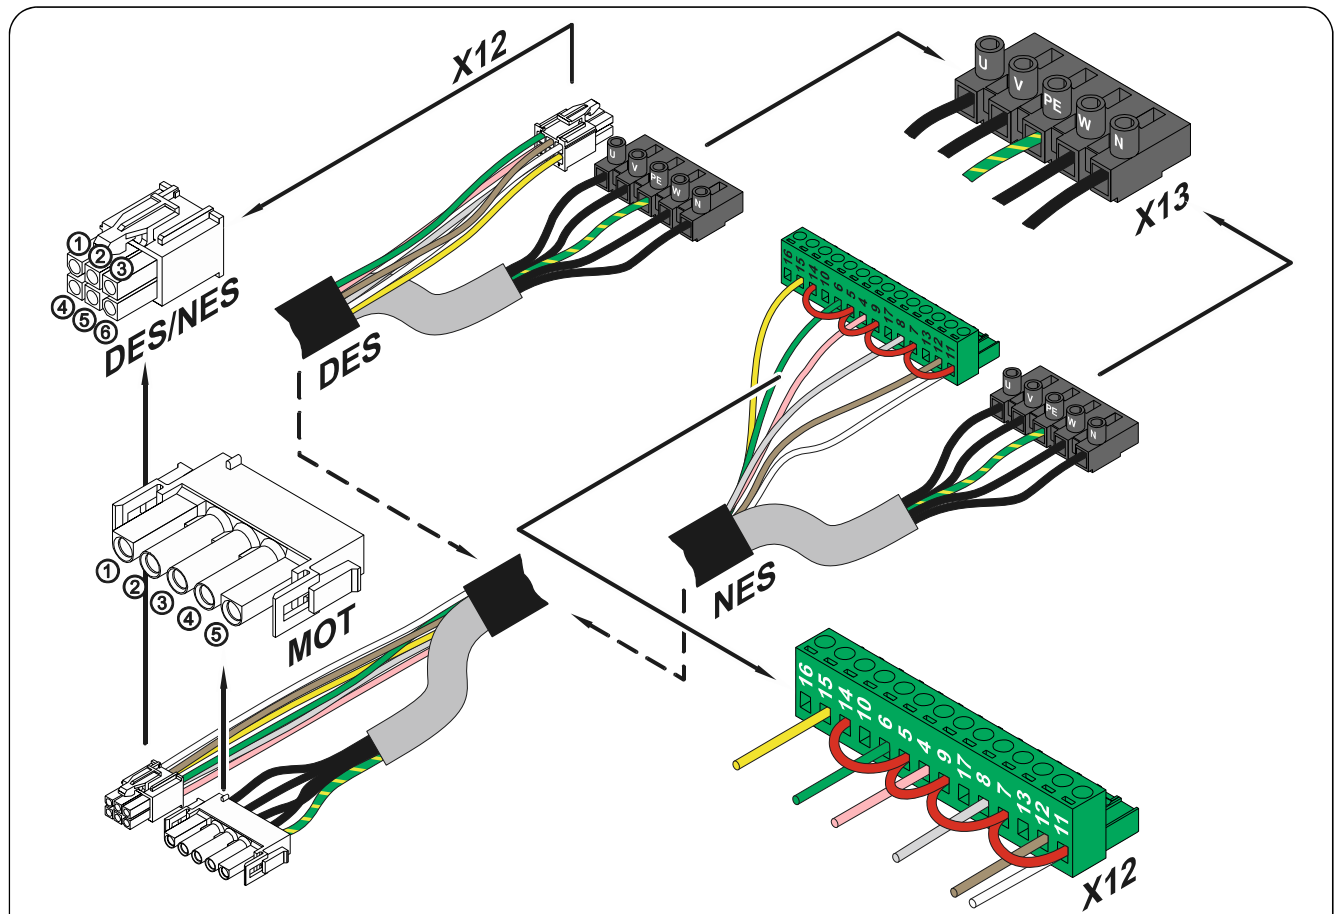


DES and NES Motor connection cable				DES Connection cable limit switch			
MOT		X13	Motor plug	DES		X12	Limit switch plug
Pin	Core	Term.		Pin	Core	Term.	
1	3	W	Phase W	1	5/wh	1	+24 V safety circuit
2	2	V	Phase V	2	6/bn	2	Channel B (RS485)
3	1	U	Phase U	3	7/gn	3	Ground
4	4	N	Neutral conductor (N)	4	8/ye	4	Channel A (RS485)
5	PE	PE		5	9/gy	5	Safety circuit
				6	10/pk	6	8 V DC supply voltage


NES Connection cable			
NES		X12	Limit switch plug
Pin	Core	Term.	
1	5/wh	11	Limit switch common +24 V, wire link on X12 5, 7, 9, 11, 14
2	6/bn	12	S5 Additional limit switch, testing or safety edge function
3	7/gn	6	S3 Open limit switch
4	8/ye	15	S6 Additional limit switch, relay function or intermediate open
5	9/gy	8	S4 Closed limit switch
6	10/pk	4	Safety circuit

Carrying out the electrical installation


- Remove covers.

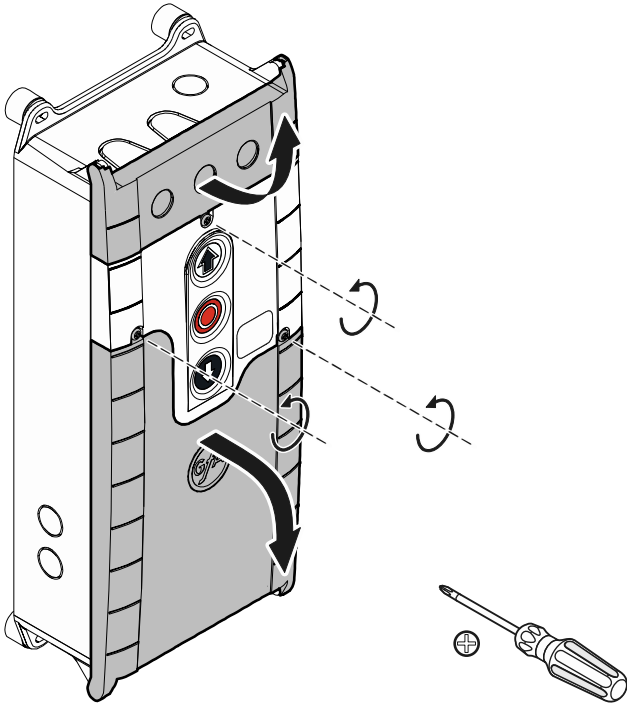

- Open cable entry ① or ②.

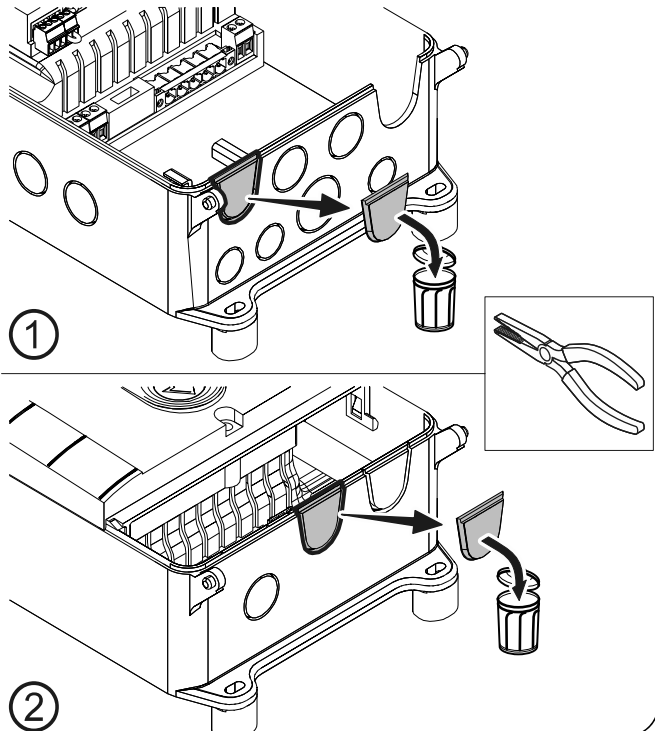





- Insert and connect connection cable in the open cable entry ① (from below) or ② (from above).
- Properly tighten cable glands.


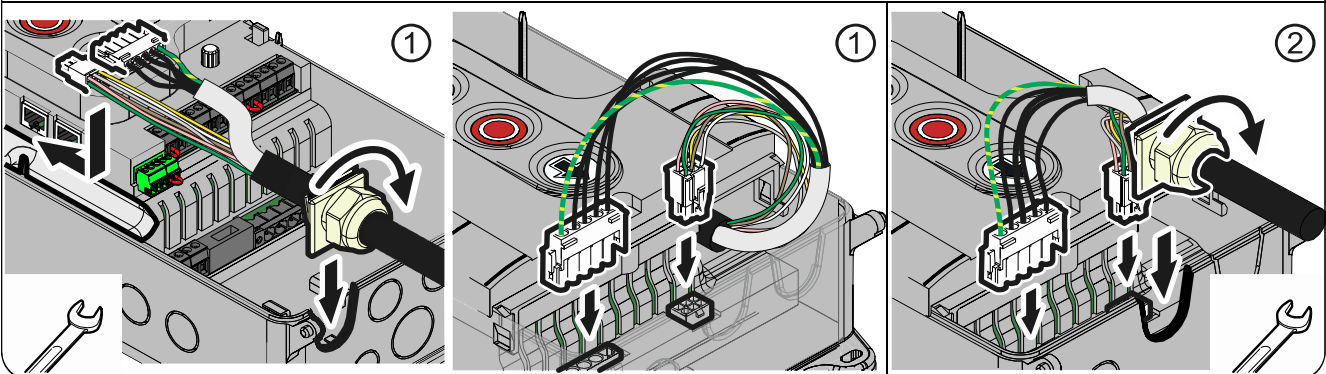


Caution - Damage of components!


- Open cable entry with suitable tool
- Install cable entries and/or cable glands

Mains connection

3-phase current, with neutral conductor	3-phase current without neutral conductor	1-phase symmetrical	1-phase asymmetrical
			

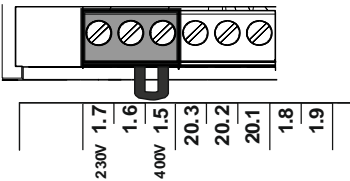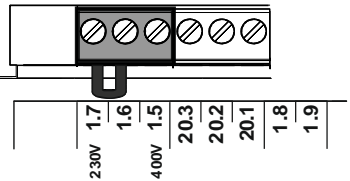3 x 400V	1 x 230V / 3 x 230V
	

Mains connection to control

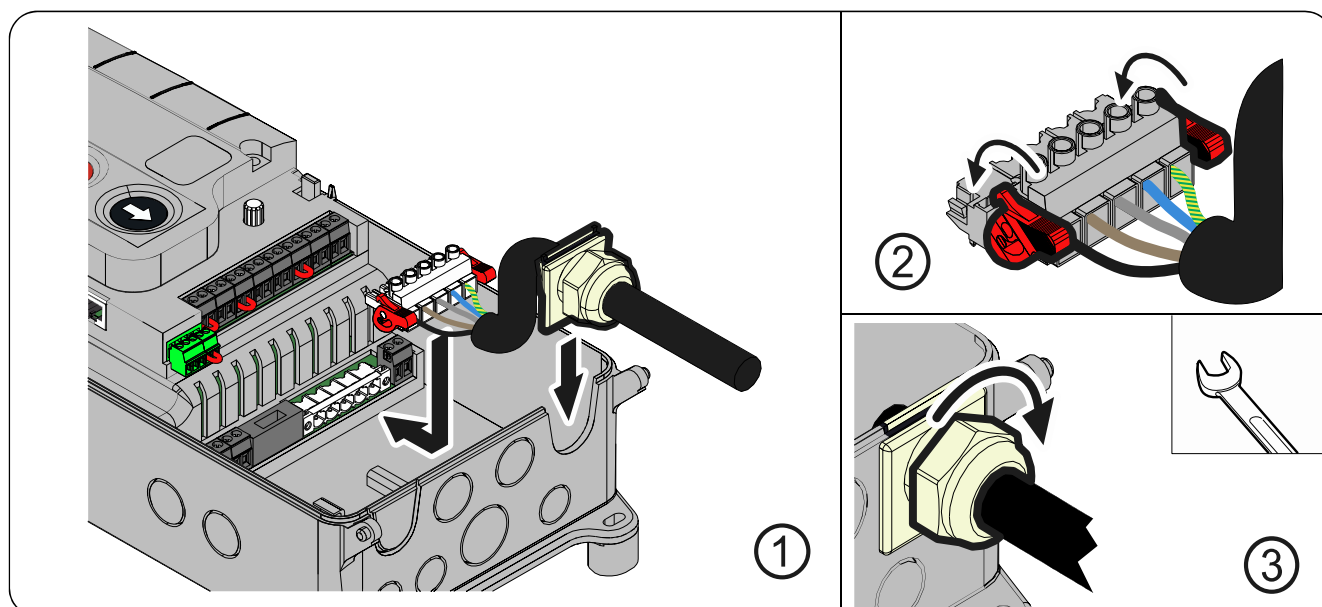

Completing the electrical installation

Connect any other control devices and/or safety devices.

Install and tighten cable entries and/or cable glands.

For initial operation, leave the control covers open.

MAXSPEED® MODEL ADJUSTMENTS

On all MaxSpeed® model doors please adjust speed for the following parameters:

4.1 (opening speed)

Door Model Speed


MS350 - full speed parameters can be set to 100

MS500 - full speed parameters can be set to 80

MS1000 - full speed parameters can be set to 30



Overview of control

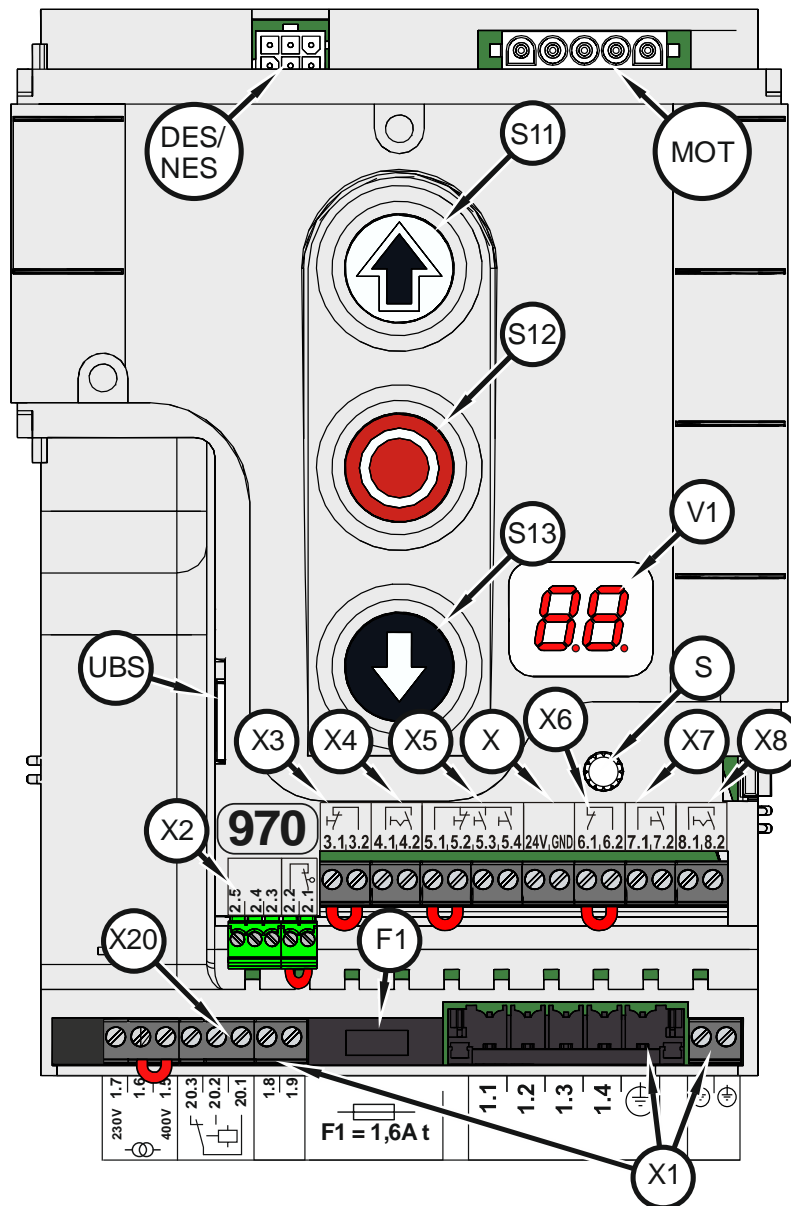

DES/NES	DES or NES limit switch socket	X	24 V mains supply, external devices
MOT	Motor socket	X1	Mains supply
S	Selector switch	X2	Safety edge system and Door safety switch
S11	Open push-button	X3	Emergency stop button
S12	Stop button	X4	Automatic closing On/Off
S13	Close push-button	X5	Control device, external three push-button
UBS	Universal command sensor socket	X6	Through photo cell, reflective photo cell
V1	Display	X7	Pull switch
		X8	Intermediate open On/Off
		X20	Potential-free relay contact 1

WIRING GUIDE



Terminal

Safety Edge (coil cord)

2.3

2.4

Safety Edge (wireless transmitter)

Black Wire from safety edge

Middle Terminal

White Wire from safety edge

"Banda"Terminal

Safety Edge (wireless receiver)

Terminal 1	24
Terminal 2	GND
Terminal 3	2.3
Terminal 4	2.4

Allen Bradley Photocell

Blue Wire	GND
Brown Wire	24V
Black Wire	6.2
Orange Wire	6.1

Radio Reviewer



24V	24V
GND	GND
Relay NO	7.1
Relay COM	7.2

Light Curtain

Blue Wire + Blue Wire	24V
Brown Wire + Brown Wire	GND
Black T	6.1 & 6.2


5 Starting up the control

- Plug in or switch on the mains supply line




DES: Rapid adjustment of final limit positions


1. Check rotating direction

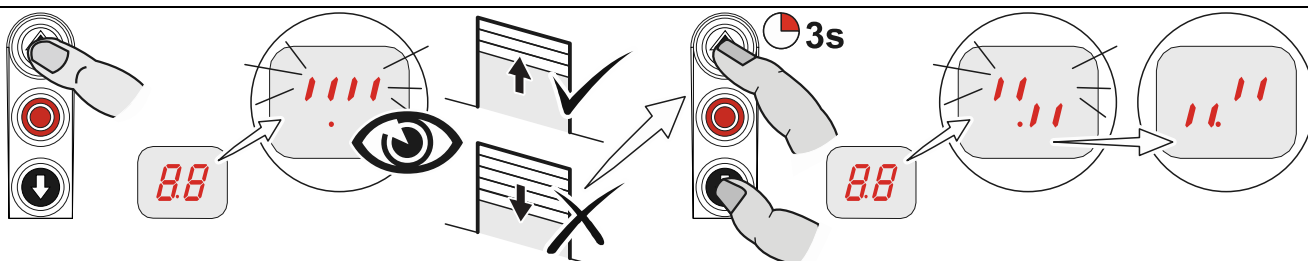


2. Move to open final limit position

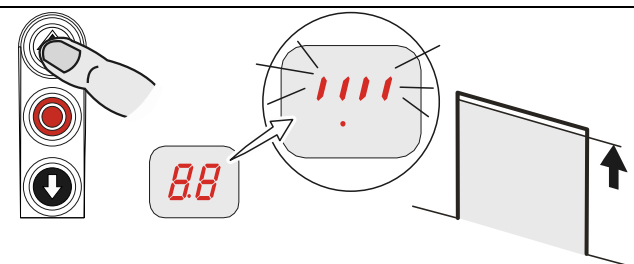


3. Save open final limit position

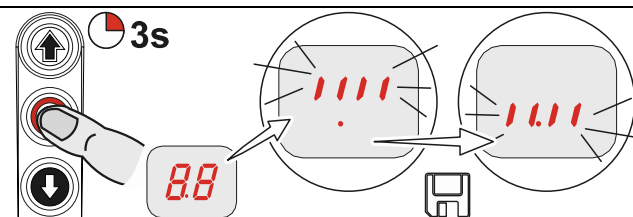

4. Move to close final limit position

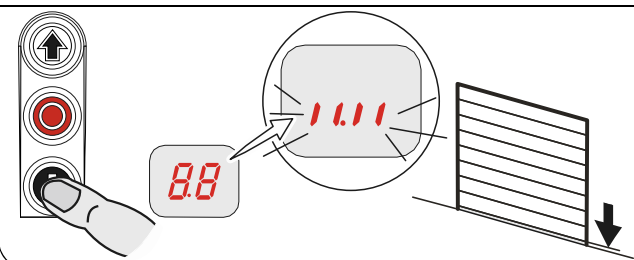

5. Save close final limit position

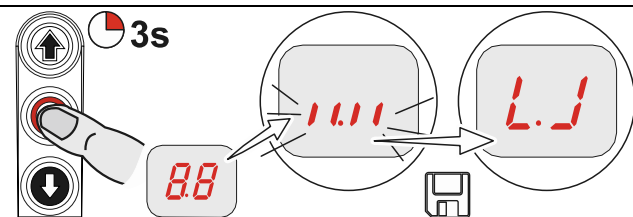

Note!

- Rapid adjustment is complete, "Hold-to-run" door operating mode is active
- Change of OPEN/CLOSE final limit positions via menu items "1.1" to "1.4"
- Pre-limit safety edge adjusts automatically
- Changing the pre-limit position is possible via menu item "1.5"




Read the drive unit installation instructions!


- For adjusting the mechanical limit switch, see the drive unit installation instructions

NES: Rapid adjustment of final limit positions


1. Check rotating direction

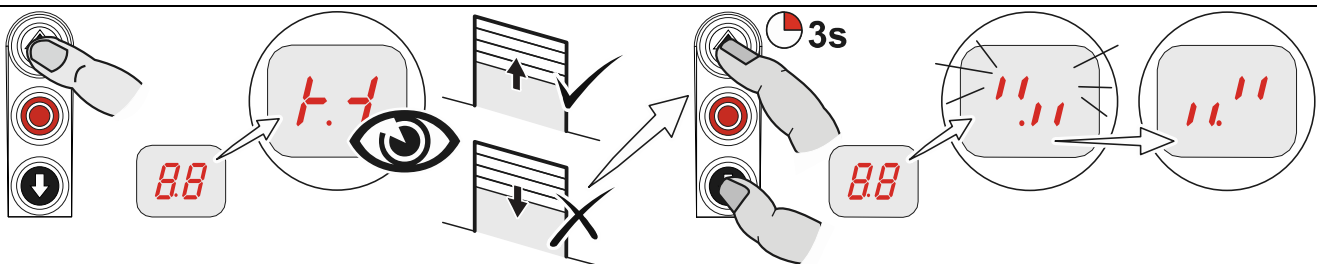


2. Move to open final limit position and adjust S3 OPEN limit switch

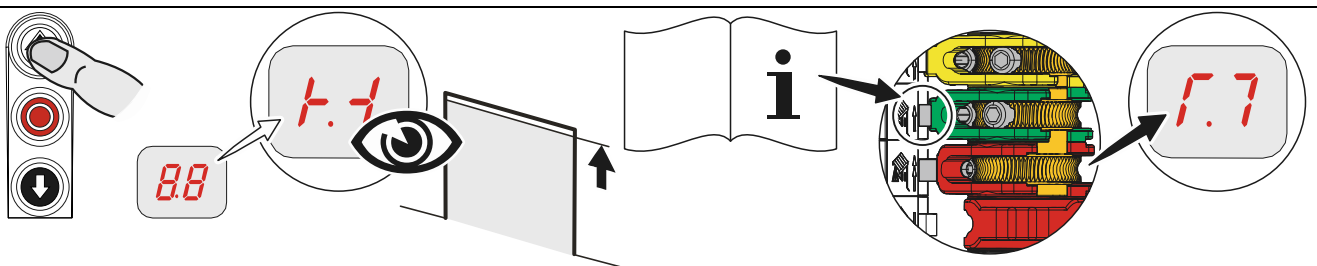




3. Move to close position 5cm above the ground and adjust S5 pre-limit switch



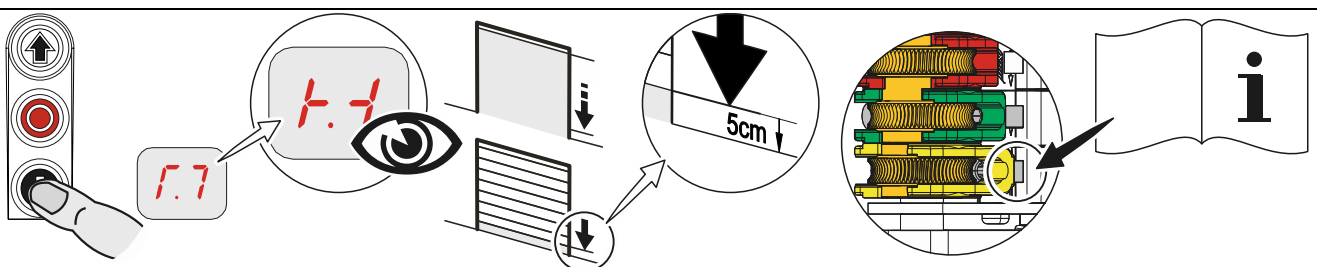





4. Move to close final limit position and adjust S4 CLOSE limit switch



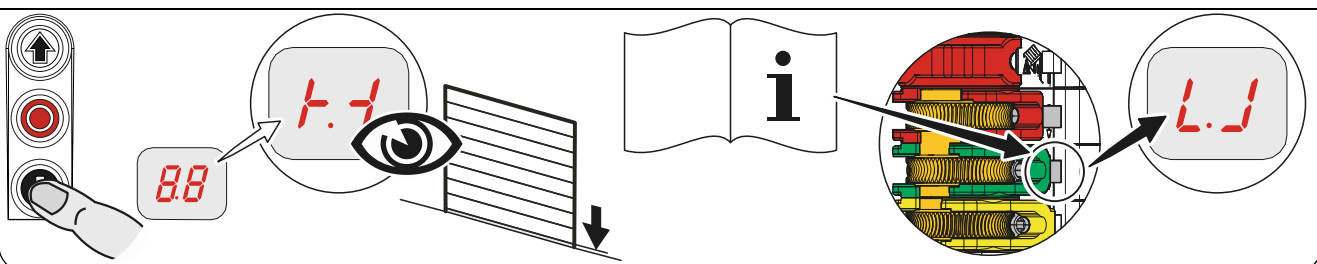






6 Electrical installation – control accessories

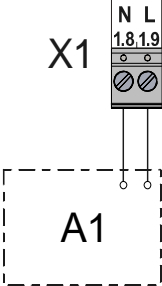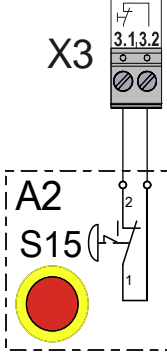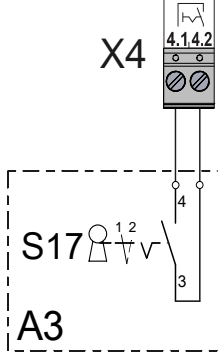X1 External supply		X3 Emergency stop		X4 Automatic closing On/Off	
					
A1	External device	A2	Control device Emergency stop	A3	Control device Key-switch

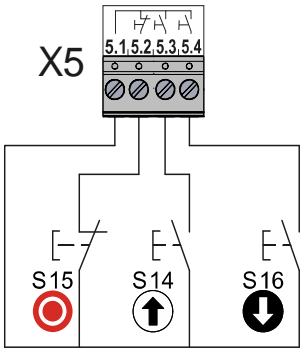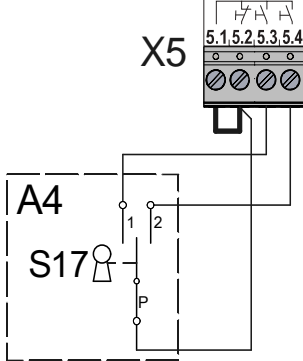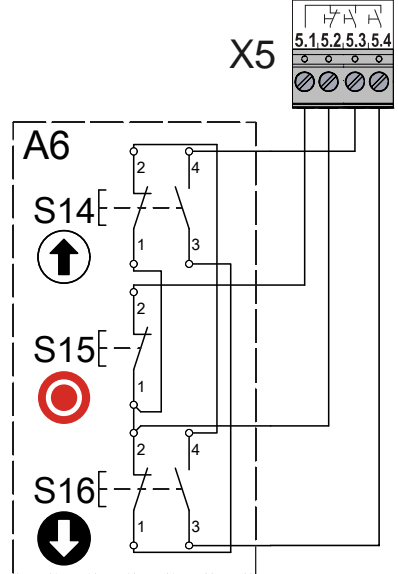X5 Control device					
					
		A4	Key-switch	A6	Three push-button

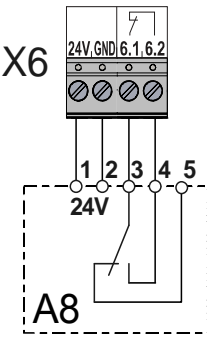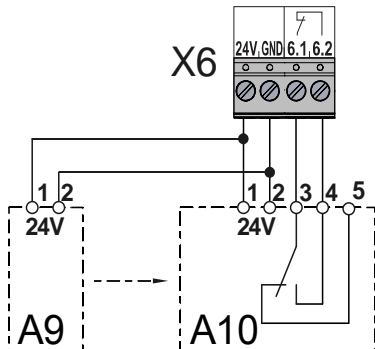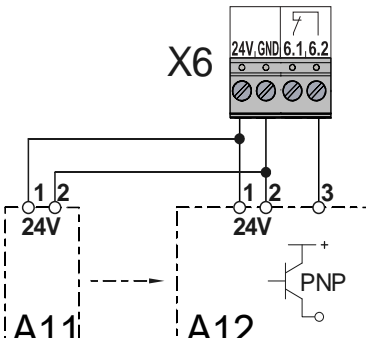
X6 Photo cell			
			
			
A8	Reflective photo cell	A9 A10	Through photo cell Transmitter Receiver
		A11 A12	Through photo cell Transmitter Receiver

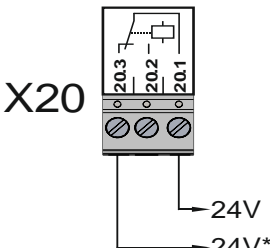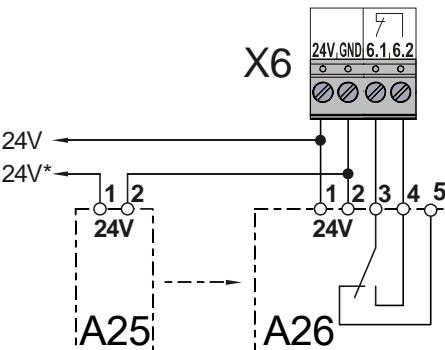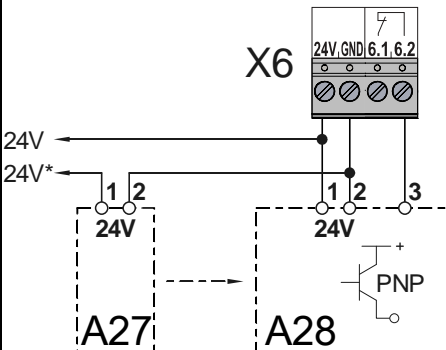X6 Light curtain			
			
			
X20	Function relay	A25 A26	Light curtain Transmitter Receiver
		A27 A28	Light curtain Transmitter Receiver

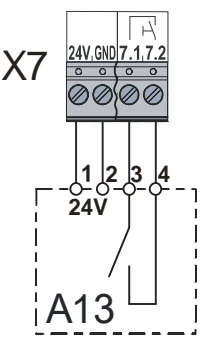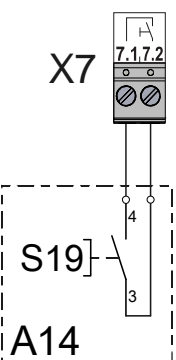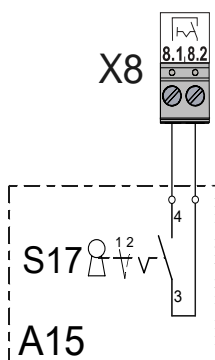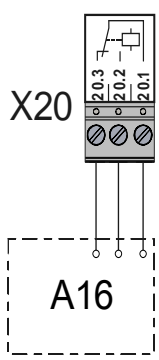X7 Radio receiver	X7 Pull switch	X8 Intermediate open	X20 Relay contact
			
A13	A14	A15	A16


Spiral cable connection

Electrical safety edge system

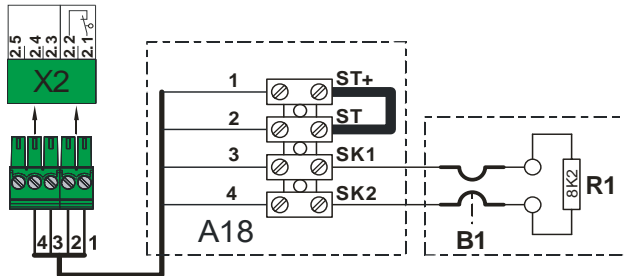


- A18** Junction box
- ST+** Voltage supply
- ST** Door safety switch input
- SK1** Electrical safety edge system input
- SK2** Electrical safety edge system input
- B1** Electrical safety edge system
- R1** End of line resistor 8k2
- X2** Door control socket

Pneumatic safety edge system

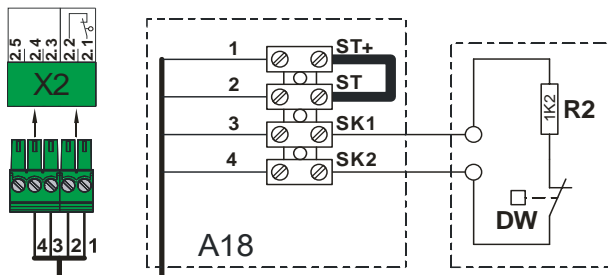


- A18** Junction box
- ST+** Voltage supply
- ST** Door safety switch input
- SK1** Pneumatic safety edge system input
- SK2** Pneumatic safety edge system input
- DW** Pneumatic switch
- R2** Series resistor 1k2 testing
- X2** Door control socket

Optical safety edge system

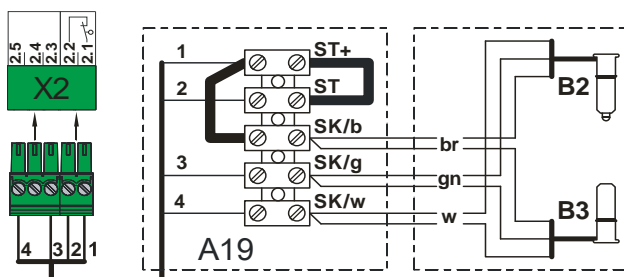


- A19** Junction box
- ST+** Voltage supply
- ST** Door safety switch input
- SK/b** Mains supply (brown)
- SK/g** Output (green)
- SK/w** Ground (white)
- B2** Optical transmitter
- B3** Optical receiver
- X2** Door control socket

Door safety switch



- A18** Junction box
- A19** Junction box
- A20** Junction box switch
- S30** Pass-door switch (NC)
- S31** Slack-rope switch (NC)

Door safety switch, crash switch

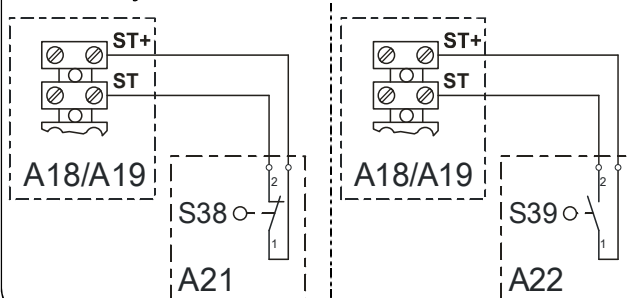


- A18** Junction box
- A19** Junction box
- A21** Junction box switch
- S38** Crash switch (NC)
- A22** Junction box switch
- S39** Crash switch (NO)

Completing the electrical installation


If required, connect other electrical equipment and/or safety devices, install cable entries and/or cable glands.

7 Control programming


1. Programming can only be accessed after rapid adjustment of final limit positions!

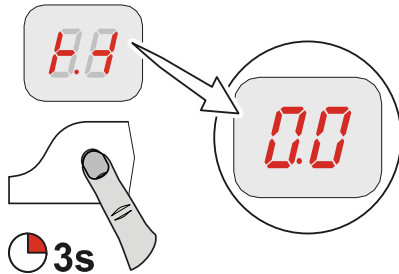


2. Select menu item and confirm

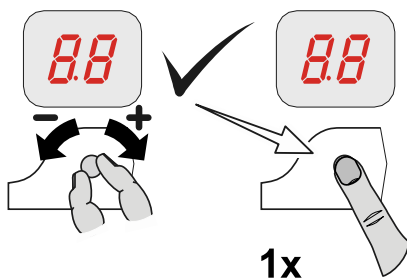


3.a) Set and save functions

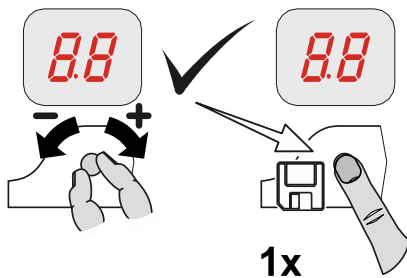


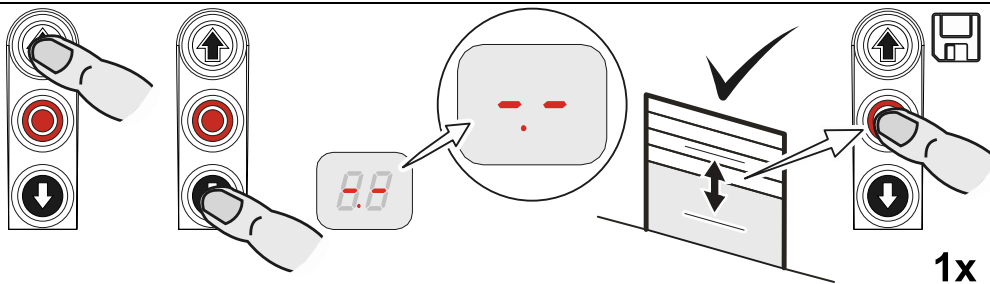








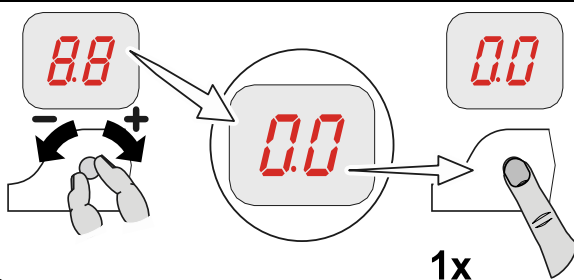








3.b) Set and save positions









































































4. Exit programming






































8 Table of menu items

Operating mode				
	 1x	Door operating mode		
		OPEN Hold-to-run CLOSE Hold-to-run	 1x	
		OPEN Self-hold CLOSE Hold-to-run		
		OPEN Self-hold CLOSE Self-hold		
		OPEN Self-hold CLOSE Self-hold, CLOSE hold-to-run release via external X5 control device		
		OPEN Hold-to-run CLOSE Hold-to-run with active safety edge system		
	 1x	Rotating direction		
 		Maintain rotating direction	 1x	
		Change rotating direction		




















Door positions				
		OPEN final limit position, coarse correction		
			OPEN/CLOSE door movement	
		CLOSE final limit position, coarse correction		
			OPEN/CLOSE door movement	
		OPEN final limit position, fine correction		
				
Without door movement, [+] correct in OPEN [-] correct in CLOSE				
		CLOSE final limit position, fine correction		
				
Without door movement, [+] correct in OPEN [-] correct in CLOSE				
		Pre-limit safety edge, fine correction		
				
Without door movement, [+] correct in OPEN [-] correct in CLOSE				
		Intermediate open		
			OPEN/CLOSE door movement For NES: Set additional S6 limit switch	
		Adjust position of relay switching point Select relay function via menu item 2.7		
			OPEN/CLOSE door movement For NES: Set additional S6 limit switch	

Door functions part 1					
		Safety edge function in the pre-limit area			
		Safety edge system active		 	
		Safety edge system inactive			
		Ground adjustment (DES)			
		Reversing upwards in the overrun area (DES)			
		Overrun correction (DES)			
		Off		 	
		On			








Door functions part 2

Door functions part 2									
2.3		Automatic closing							
					0 to 240 seconds				
2.4		Advanced photo cell function							
		Off							
		Cancel automatic closing and CLOSE command							
		Vessel recognition Cancel automatic closing and CLOSE command if photo cell is activated > 1.5 seconds							
2.5		Reversing							
				1 to 10 safety device activations					
2.6		Pull switch or radio receiver function X7							
		Pulse type 1 Door is not in OPEN final limit position OPEN command Door is in OPEN final limit position CLOSE command							
		Pulse type 2 Step by step command order OPEN – STOP – CLOSE – STOP							
		Pulse type 3 OPEN command only							

































Door functions part 3































































2.7		Relay function on X20 Teach-in door position via menu item 1.7 (DES only)	
	1x	<div>  1x </div>	 
		Off	
		Pulse signal for 1 second	
		Permanent signal	
		Red lamp, permanent light during door movement OPEN final limit position 3 seconds flashing CLOSE final limit position 3 seconds flashing	
		Red lamp, permanent light during door movement OPEN final limit position 3 seconds flashing CLOSE final limit position Off	
		Red lamp, permanent light during door movement OPEN final limit position 3 seconds permanent light CLOSE final limit position 3 seconds permanent light	
		Red lamp, permanent light during door movement OPEN final limit position 3 seconds permanent light CLOSE final limit position Off	
		Green light Permanent light, at OPEN final limit position	
		Light sensing device 1 second pulse at each OPEN command	
		Permanent contact at door position	
		Brake control Active during operation Inactive at stop	
		Clearance dock leveller Active at OPEN final limit position only	
		Light curtain test, etc. Test before each closing operation	























Door functions part 4

2.9		Partly open function			
		All command inputs active			
		Input X7.2 and internal radio receiver active			
		Input X5.4 and OPEN push-button active			


Safety functions

3.1		Force monitoring (DES)			
					0 = Off Adjustable from 2 % to 10 % overload
3.2		Interruption to photo cell operation			
		Off			
		On (teach-in the same reference position twice)			
3.3		Travel time monitoring (NES) only			
				0 = Off 0 to 90 seconds	
3.4		Door safety switch function (input X2.2)			
		Slack-rope or pass-door switch			
		Crash detector (NC contact)			
		Crash detector (NO contact)			
3.8		Reversing duration adjustment			
				[+] slower [-] faster	

DU/FI settings										
4.1		OPEN output speed								
					Output speed in rpm				1x	
4.2		CLOSE output speed								
					Output speed in rpm				1x	
4.3		Increased CLOSE output speed To opening height of 2.5 m								
					Output speed in rpm 0 = Off				1x	
4.4		Changeover position to CLOSE output speed (observe minimum opening height of 2.5 m!)								
		OPEN/CLOSE door movement								1x
4.5		OPEN acceleration								
					DU	Steps of 1.0 seconds Steps of 0.1 seconds			1x	
					FI					
4.6		CLOSE acceleration								
					DU	Steps of 1.0 seconds Steps of 0.1 seconds			1x	
					FI					
4.7		OPEN brake								
					DU	Steps of 1.0 seconds Steps of 0.1 seconds			1x	
					FI					
4.8		CLOSE deceleration								
					DU	Steps of 1.0 seconds Steps of 0.1 seconds			1x	
					FI					
4.9		OPEN/CLOSE crawling speed								
					Output speed in rpm				1x	

Maintenance cycle counter										
		Maintenance cycle adjustment								
1x							01-99 corresponds to 1,000 to 99,000 cycles Cycles are counted down			
1x										
		Reaction on reaching zero								
1x				"CS" display with set value of maintenance cycle						
				Changeover to hold-to-run and "CS" display with set value of maintenance cycle						
				Changeover to hold-to-run and "CS" display with set value of maintenance cycle. Pressing the Stop button for 3 sec re-enables 500 automatic cycles						

Readout information store



Cycle counter reading

7-digit number



M



HT



ZT



T



H




Z



E

Cycle counter reading in divisions of ten consecutively


M = 1,000,000 ZT = 10,000 H = 100 E = 1
HT = 100,000 T = 1,000 Z = 10



Last Fault



The six most recent faults are indicated alternately



Cycle counter reading of the last programming change

7-digit



M



HT



ZT



T



H




Z



E

Cycle counter reading in divisions of ten consecutively

M = 1,000,000 ZT = 10,000 H = 100 E = 1
HT = 100,000 T = 1,000 Z = 10




Firmware version



The firmware version of the control is displayed.
In conjunction with DU or FI, additional firmware version of DU or FI.

Clear



Clear all settings



All (factory setting)!
Except for cycle counter



9 Safety devices

X2: Input, door safety switch

The door safety switch is installed on the door and connected to the door control via the spiral cable.

Menu item "3.4":

Function type	Reaction upon activation
"1" Slack-rope/pass-door	Switch contact open: Door stops
	Switch contact closed: Door ready for operation
"2" Crash switch as NC	Switch contact open: Door stops
	Switching contact closed: Changeover to hold-to-run mode With frequency inverter: Door moves at crawling speed only Resetting the error: Press the stop button of the door control for 3 seconds
"3" Crash switch as NO	As function type "2"

Slack-rope/pass-door

If the switch is open and simultaneously the command from the final limit positions is active, the "F1.2" fault indication is displayed. If activation occurs during the door movement, there is an immediate stop and the "F1.2" fault indication is displayed.

Pass-door switch: Entry sense

The switch, tested in performance level c (plc) category 2 (as defined in EN 13849-1), is monitored by the door control. If the switch is open and simultaneously the command from the final limit positions is active, the "F1.2" fault indication is displayed. If activation occurs during the door movement, there is an immediate stop and the "F1.2" fault indication is displayed.

The magnetic contacts in the switch are switched by a permanent magnet. The door control assesses the switching status of the contacts independently of each other.

The "F1.7" fault indication appears if there is a fault.

Crash switch as NC or NO contact

The crash switch is activated if the door is pushed out of the guides. The door is stopped and fault F4.5 is displayed, if the switching contact is activated. After resetting the switching contact, operation is switched to hold-to-run mode. The door can be moved only via the integrated push-buttons, and at crawling speed in frequency inverter operation.

Reset fault indication "F4.5" by pressing the stop button for more than 3 seconds or by switching the mains voltage off and on.

X2: Input, safety edge system

The door control automatically detects three different safety edge systems.

1K2 resistor evaluation

8K2 resistor evaluation

Optical safety edge system



Important!

- Connect safety edge systems in accordance with EN 12978
- The hold-to-run control can always be used should the safety edge system be defective



Important!

- Check the pre-limit safety edge position
- The door must stop and re-open if the safety edge is activated when the door is opened > 5cm.

Function of the safety edge system in the pre-limit area

Menu item "2.1":

Function type	Reaction upon activation of the safety edge system
"1" Active	Stop
"2" Inactive	No reaction; door moves to CLOSE final limit position
"3" Ground adjustment (DES)	Stop; correction of the CLOSE final limit position at the next closing
"4" Reversing in the pre-limit area (DES)	Reversing upwards from the overrun area upon activation of the safety edge system



Note: Ground adjustment!

- Automatic compensation of rope stretches or changes in ground conditions of approx. 2-5 cm
- With DES limit switch only
- Do not use with overrun correction
- Do not use with pneumatic switch



Note: Reversing upwards in the overrun area!

- To maintain the operating forces in the pre-limit area
- At high speeds
- With DES limit switch only
- Function for FI-drive units not necessary

Function of overrun correction

Menu item "2.2":

Automatic limit switch correction to achieve a constant CLOSE position.

Function type	Overrun correction
"0"	Off
"1"	On



Note: Overrun correction!

- With DES limit switch only
- Do not use with ground adjustment

Reversing function

Menu item "2.5":

Setting of maximum number of operations for safety-edge activations at automatic closing. If the set value is exceeded, automatic closing is deactivated and the "F2.2" fault indication is displayed.



Note!

- Reset of fault indication "F2.2": Upon reaching the CLOSE final limit position

X3: Input, emergency stop

Connection of an emergency stop control device as per EN 13850 or an evaluation unit for an anti-trap safety device. The "F1.4" fault indication appears upon activation.



Note!

- With FI-drive units, only the drive unit is de-energised by the emergency stop

10 Functional description

X: 24 V DC voltage supply

Connection of external devices such as photo cell, radio receiver, relay, etc. via the 24 V and GND terminals.



Caution - Damage of components!

- Total current consumption of external devices: maximum 180 mA

X1: Mains supply line for control and external supply

Mains supply line for control

Connection via terminals X1/1.1 to X1/1.4 and PE.

Various mains supply connections: 3 N~, 3~, 1 N~ for symmetric and asymmetric motors.

400V mains = 1.5 - 1.6 wire link

230V mains = 1.6 - 1.7 wire link



Note!

- ▶ Pay attention to the "Mains supply connection" and "Mains supply connection to control" descriptions

External supply

Connection of external devices for 230 V, such as photo cell, radio receiver, relay, etc. via terminals X1/1.8 and X1/1.9.



Note!

- Supply of external devices 3 N~400 V or 1 N~230 V, symmetric
- Protection via F1, 1.6-A time-lag micro-fuse

X4: Input, automatic closing Off/On

Connection of a switch via terminals X4/1 and X4/2 for switching the automatic closing off and on.

X5: Control device



Warning!

- "Hold-to-run" door operating mode:
The door must be fully visible from the operating point

Door operating mode "3" allows a place of assembly of the control device without sight of the door. If the safety edge system or photo cell fails, the control device does not function.



Note!

- ▶ Wire link X5.1 to X5.2 for using the control device without stop button

X6: Input, through / reflective photo cell or light curtain

Photo cell

A photo cell is used for presence detection. It is only active in door operating modes "3" and "4", in the OPEN final limit position or during the closing operation.

If the photo cell is interrupted, fault indication "F2.1" appears.

Light curtain

The light curtain must be self-testing and correspond at least to safety category 2 or performance level c (plc). If the light curtain corresponds to these requirements, the door can close into self-hold without safety edge system.



Important!

- ▶ Operation without safety edge system, connect 8K2 resistor via terminals X2/3 and X2/3
- ▶ Photo cells must not be used via the UBS system
- ▶ Do not use menu item "3.2" for the light curtain

To test the light curtain, activate relay contact X20 or X21. For a description of the relay functions see menu item "2.7". If the photo cell is interrupted, fault indication "F4.6" appears. Testing is carried out at each CLOSE command, the contact of the light curtain must switch off within 100 ms. If the test is positive, the contact must switch back on within 300 ms. If the test fails, fault indication "F4.7" appears.

Reset fault indication "F4.7": Switch control off and on.



Note!

- Only use photo cells or light curtains with "Light switching" mode

Effect of interrupting the photo cell

Door position	Effect of interrupting the photo cell
CLOSE final limit position	No function
Upwards travel	No function
OPEN final limit position Without automatic closing	No function
OPEN final limit position With automatic closing	Reset automatic closing
OPEN final limit position With automatic closing and interruption to timer	The door closes 3 seconds after the interruption period for the photo cell has ended

Advanced photo cell function

Menu item "2.4":

Function type	Advanced photo cell functions
"0"	No function
"1" automatic closing	The door closes 3 seconds after the interruption period for the photo cell has ended
"2" vessel recognition	Door closes if photo cell is interrupted for more than 1.5 seconds. No action if photo cell is interrupted for less than 1.5 seconds.

Interruption to photo cell operation

Menu item "3.2"

Function type	Interruption to photo cell operation
"0"	Off
"1"	On

Teach-in mode first active when exiting the programming.



Warning!

- Presence detection is disabled in the teach-in mode

In the teach-in mode, the door must be fully opened and closed twice. The photo cell must be interrupted twice at the same door position. The teach-in mode is then terminated. The photo cell has no function below this stored door position.

Teach-in mode display	
Upon exiting the programming	2.7
When the light beam is interrupted for the first time	1.7
After the second interruption to the light beam at the same door position, and with the CLOSE final limit position reached	L.7



Note!

- If the teaching-in is not successful, open and close the door again, so that two identical door positions are stored

X7: Input, pull switch/radio receiver

Connection of a pull switch or external radio receiver via terminals X7/1 and X7/2. The switching contact must be potential-free (NO contact).

Pull switch or radio receiver function

Menu item "2.6":

Pulse type	Reaction upon activation
"1"	The door CLOSES from the open final limit position or the intermediate open. The door OPENS from all other door positions or door movements.
"2"	OPEN-STOP-CLOSE-STOP command serie
"3"	Door always executes OPEN movement

X8: Input, intermediate open On/Off

Connect a switch to terminals X8/1 and X8/2 to activate and deactivate the intermediate open. Set the intermediate open position via menu item "1.6".

With an OPEN command, the door moves to the stored door position. When the intermediate open function is deactivated, the door can move back to the OPEN final limit position.

Partly open function

Menu item "2.9":

Function type	Intermediate open
"1"	All command inputs
"2"	Intermediate open via X7 pull switch. OPEN final limit position via all other control devices.
"3"	Intermediate open via external X5 control device and internal control device. OPEN final limit position via all other control devices.

X20: Potential-free relay contact

The relay functions are described under menu item "2.7".



Caution - Damage of components!

- Maximum current of 1 A at 230 VAC and 0.4 A at 24 VDC
- We recommend the use of LED lamps
- When using light bulbs, these should have power of maximum 40 W and be shock-proof

Force monitoring (DES only)

Menu item "3.1":

The force monitoring function can only be used with fully balanced doors and drive units with DES switches. It should be able to detect when persons are moving with the door



Warning!

- The force monitoring is no substitute for safety measures in providing protection against the trapping hazard

Function type	Force monitoring
"0"	Off
"2" - "10"	2 - low limit value 10 - high limit value



Important!

- Force monitoring for doors with spring balance only
- Environmental factors such as temperature or wind load can lead to inadvertent triggering of the force monitoring

After exiting programming, the door must carry out a full opening and closing operation in self-hold mode.

The force monitoring is a self-learning system which is effective for an opening width range of 5 cm to 2 m (approx.). Slow progressive changes, e.g. gradual reduction of the spring torsion, are compensated for automatically.

If force monitoring is triggered, only the "hold-to-run" door operating mode is possible and the "F4.1" fault indication is displayed. Resetting occurs when a final limit position for the door is reached.

Travel time monitoring (NES only)

Menu item "3.3"

The set travel time is automatically compared with the time measured for movement between the final limit positions. If the travel time is exceeded, the "F5.6" fault indication appears.

Fault indication "F5.6" is reset by closing the door.



Note!

- The travel time is set at the factory to 90 seconds
- Recommended setting value: Door travel time + 7 seconds

UBS system





The UBS system is a simple pluggable connection technology from GfA. The control devices are connected to the control by a commercially available patch cable and detected automatically.



Note!

- The UBS devices function in the same way as wired control devices

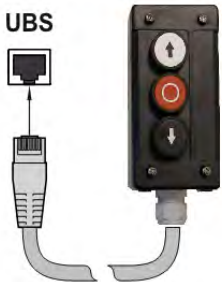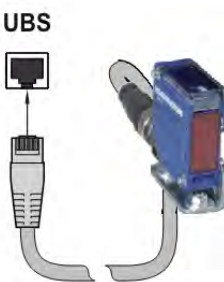UBS connection

			
Three push-button	Reflective Photo cell	External Radio receiver	Pull switch

Reversing duration adjustment

Menu item "3.8":

Shortening the reversing duration will reduce the operating forces. Extending it, on the other hand, will reduce the wear on the door mechanism.

Maintenance cycle counter

Menu item "8.5":


A value between 0 and 99,000, as a multiple of 1000, can be selected for the maintenance cycle setting.

The maintenance cycle counter reading is reduced by one each time the Open final limit position is reached.

Once the maintenance cycle reaches zero, the setting from menu item "8.6" is activated.

Short-circuit/overload display

If there is a short circuit or an overload of the 24 VDC supply voltage, the 7-digit display vanishes.

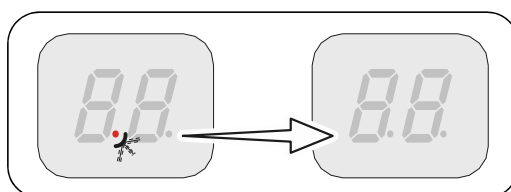


Standby function

If there is no fault or command pending, the control switches the display to "Standby".










Standby is active if the automatic closing duration is longer than 60 seconds.











Only the left point is displayed.

























Execution of the "Standby" function is stopped by issuing a command or by operating the "S" selector switch.








11 Status display





Faults		
	Display: "F" and code	
Status-code	Fault description	Measures for fault correction
	Terminals X2.1 – X2.2 are open. Slack-rope/pass-door contact open.	Check door safety switch. Check whether the connection cable is connected.
	DES safety circuit is open. Emergency manual operation has been activated. Thermal protection of the motor has tripped	Check emergency manual operation. Check for overload or stalling of the drive unit.
	Terminal X3.1 – X3.2 is open. Emergency stop has been activated.	Check emergency stop. Check whether the connection cable is connected.
	Faulty "Entry sense" switch. Contact resistances are too high. Faulty entry sense installation.	Open and close pass-door. Check resistance. Check pass-door installation.
	Entry sense input (X2.1 – X2.2) faulty.	Switch control off and on. Replace control if necessary.
	No safety edge is detected.	Check the wiring of the safety edge system.
	Terminals X6.1 – X6.2 are open. Photo cell has been activated.	Check alignment of the photo cell. Check connection cable. Replace photo cell if necessary.
	Maximum number of reversing movements for door through safety edge system activation has been reached. (Only with automatic closing)	Obstacles in the door travel way. Check whether the safety edge system is correctly functioning.













Faults		
	Display: "F" and code	
Status-code	Fault description	Measures for fault correction
	8k2 safety edge system has been activated.	Check whether the safety edge system is correctly functioning. Check whether the connection cable has short-circuited.
	8k2 safety edge system is defective.	Check whether the safety edge system is correctly functioning. Check whether the connection cable is connected.
	1k2 safety edge system has been activated.	Check whether the safety edge system is correctly functioning. Check whether the connection cable is connected.
	1k2 safety edge system is defective.	Check whether the safety edge system is correctly functioning. Check whether the connection cable has short-circuited.
	1k2 testing is negative.	Testing is activated in the lower final limit position. Check pre-limit switch (with NES "S5").
	Optical safety edge system has been activated or is defective.	Check whether the safety edge system is correctly functioning.
	(DES) OPEN emergency stop switch reached.	In the voltage-free state, move the door back via emergency manual operation.
	(NES) OPEN or CLOSE emergency stop switch reached. Emergency manual operation has been activated. Thermal protection of the motor has tripped	Check OPEN/CLOSE emergency stop switch. Check emergency manual operation. Check drive unit for overload or stalling.
	(DES) CLOSE emergency stop switch reached.	In the voltage-free state, move the door back via emergency manual operation.
	(NES) Faulty activation of the "S5" pre-limit position.	Check the "S5" pre-limit position for correct functioning and setting.

Faults		
	Display: "F" and code	
Status-code	Fault description	Measures for fault correction
	No limit switch detected (active at initial start-up).	Connect the limit switch to the control. Check the limit switch connection cable
	Limit switch system has been changed without the control being reset.	Reset the control via menu item "9.5".
	Internal plausibility error.	Fault clearance with next movement command.
	Triggering of the force monitoring.	Check the door mechanism for stiffness.
	Crash detector (X2.1 – X2.2) has been activated.	Check crash detector or connection cable. Reset error, press stop button for 3 seconds.
	Terminal X6.1 – X6.2 is open. Light curtain has been activated.	Check light curtain. Check whether the connection cable is connected.
	Light curtain is defective.	Comply with the light curtain manufacturer's specification/instructions. Check connection cable.
	Controller fault.	Switch control off and on. Replace control if necessary.
	ROM error.	Switch control off and on. Replace control if necessary.
	CPU error.	Switch control off and on. Replace control if necessary.













Faults		
	Display: "F" and code	
Status-code	Fault description	Measures for fault correction
	RAM error.	Switch control off and on. Replace control if necessary.
	Internal control error.	Switch control off and on. Replace control if necessary.
	Digital limit switch error (DES).	Check DES connector and connection cable. Switch control off and on.
	Fault with door movement.	Check the door mechanism for stiffness. Check the limit switches for correct rotational movement. Switch control off and on.
	Fault with rotating direction.	Change rotating direction via menu item "0.2".
	Non-permitted door movement in stopped condition.	Release of failure through command. Check brake and drive unit.
	Drive unit does not follow specified travel direction.	Release of failure through command. Check for overload of the drive unit.
	DU / FI closing speed is too high.	Switch control off and on. Replace drive unit if necessary.
	Internal FI communication failure.	Switch control off and on. Replace FI-drive unit if necessary.
	Low voltage in the DC voltage link.	Release of failure through command. Check mains input voltage. Change slope times/speed.










Faults		
	Display: "F" and code	
Status-code	Fault description	Measures for fault correction
	Excess voltage in the DC voltage link.	Check mains input voltage. Release of failure through command. Change slope times/speed.
	Temperature limit exceeded.	Drive unit overload. Cool down the drive unit and reduce the number of cycles.
	Permanent current overload.	Check for overload of the drive unit. Check the door mechanism for stiffness or weight.
	Brake / FI fault.	Check brake, replace if necessary. If problem recurs, replace drive unit.
	FI group message.	Release of failure through command. Replace drive unit if message continues to be displayed.
	Minimum way of travel not reached during initial operation.	Move the door for at least 1 second.

Commands	
	Display: "E" and code
Code	Command description
	An open command is present. Inputs X5.3, X7.2, UBS control device or UBS radio receiver.
	A stop command is present. Inputs X5.2, X7.2, UBS control device or UBS radio receiver or simultaneous Open and Close command.
	A close command is present. Inputs X5.4, X7.2, UBS control device or UBS radio receiver.

Status indications	
Status-display	Description
	Preset value for maintenance cycle counter status reached
	Dot on left is not lit: control circuit has short-circuited or is overloaded.
	Change of rotating direction activated, only possible at initial start-up and FI-drive unit.
	Change of rotating direction carried out, only possible at initial start-up and FI-drive unit.
 Flashing	Teach-in Open final limit position.
 Flashing	Teach-in Close final limit position
 Flashing	Upwards travel active.
 Flashing	Closing operation active.
	Stop between the set final limit positions.
	Stop at the Open final limit position.
	Stop at the intermediate open position.
	Stop at the Close final limit position.

12 Explanation of symbols

Symbol	Explanation
	Prompt: Read installation instructions
	Prompt: Check
	Prompt: Note
	Prompt: Note the setting of the menu item below
	Factory setting of the menu item
	Factory setting of the menu item, value on the right
	Factory setting of the minimum limit, dependent on drive unit
	Factory setting of the maximum limit, dependent on drive unit
	Range
	Prompt: Select menu item or value, turn selector switch to the left or to the right
	Prompt: View menu item, press selector switch once
	Prompt: Save, press selector switch once

Symbol	Explanation
	Prompt: Setting via OPEN/CLOSE built in push-button; Use OPEN push-button to increase value, CLOSE push-button to decrease value
 1x	Prompt: Press stop button once via built in push-button
 1x	Prompt: Save, press stop button once via built in push-button
 3s	Prompt: Save, press stop button for three seconds via built in push-button
 3s	Prompt: Reset the control, press stop button for three seconds via built in push-button
	Prompt: Move to door position
	Prompt: Move to door position for OPEN final limit position
	Prompt: Move to pre-limit
	Prompt: Move to door position for CLOSE final limit position