

MAXFOLD™

HIGH PERFORMANCE VINYL DOOR

Ideally suited for extremely large openings!



PERFORMAX GLOBAL
HIGH PERFORMANCE DOORS

WWW.PERFORMAXGLOBAL.COM

CORPORATE: 484.840.8500

5 CROZERVILLE ROAD ASTON, PA 19014

MAXFOLD™


IDEALLY SUITED FOR EXTREMELY LARGE OPENINGS!

BENEFITS

- Custom designed for extra-large openings
- Manufactured to wind specific requirements providing optimal wind resistance
- Secure self-supporting door structure available
- SAFE, springless operation eliminates safety concerns associated with springs
- Efficient opening and closing speeds

FEATURES

- Openings up to: 200' x 150'
- Wind Load Rating up to: 200MPH
- Temperature Range: -40F to +160F
- 1 million cycle standard rating on drive system

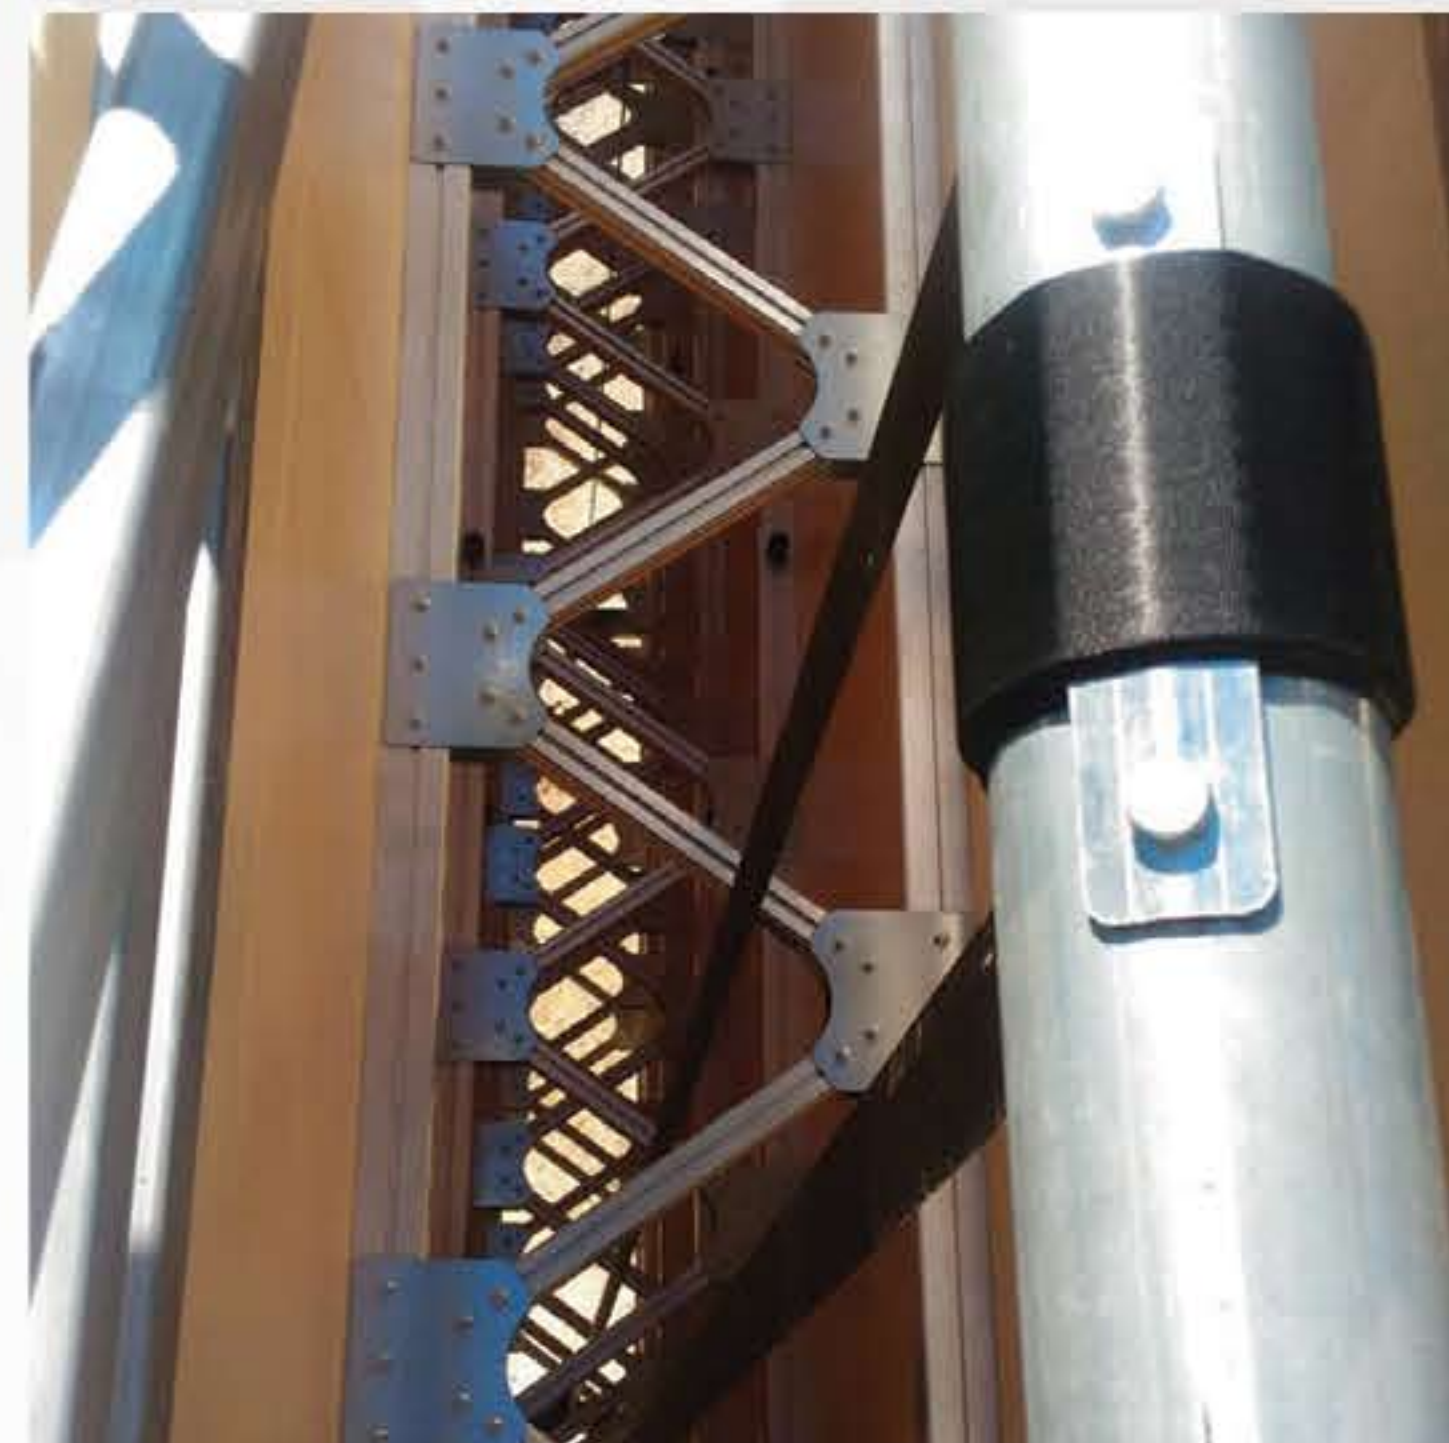

GENERAL SPECIFICATIONS

MAX SIZE	200' x 150'	OPERATING TEMPERATURE	-40F to +160F
DRIVE	Direct Drive Motor	WINDLOAD	Up to 200MPH
CURTAIN	Vinyl Curtain	PERIMETER STRUCTURE	Galvanized Steel
CURTAIN THICKNESS	.047"	INTERNAL STRUCTURE	Galvanized Steel and Aluminum Truss
CURTAIN SPECIFICATIONS	Lacquered PVC Finish on Both Sides	CURTAIN COLORS	15 Standard Colors Available
DISTANCE BETWEEN CURTAINS	Minimum of 10" and Maximum of 40"	APPLICATIONS	Large Manufacturing Facilities, Hangars, Shipyards, Transfer Stations, and Other Facilities with Large Openings
ELECTRICAL	480 Volt / 3 Phase Other Voltages Available		