MAXFREZE

HIGH PERFORMANCE VINYL DOOR

Your High Speed Solution for Freezer Applications





WWW.PERFORMAXGLOBAL.COM
CORPORATE: 484.840.8500
5 CROZERVILLE ROAD ASTON, PA 19014

YOUR HIGH SPEED SOLUTION FOR FREEZER APPLICATIONS


BENEFITS

High-speed impactable door with soft bottom edge
Offers a high degree of thermal insulation and avoids heat dispersion
Innovative double curtain low energy cost design
Fast operating speeds reduces cold air loss


FEATURES

Two curtains rolling simultaneously to create a controlled air space minimizing condensation Curtain remains frost free from climate controlled vestibule at the lowest energy expense Galvanized steel frame with option for powder coating or stainless steel guides Direct drive springless motor requires minimal maintenance and provides a safer operation



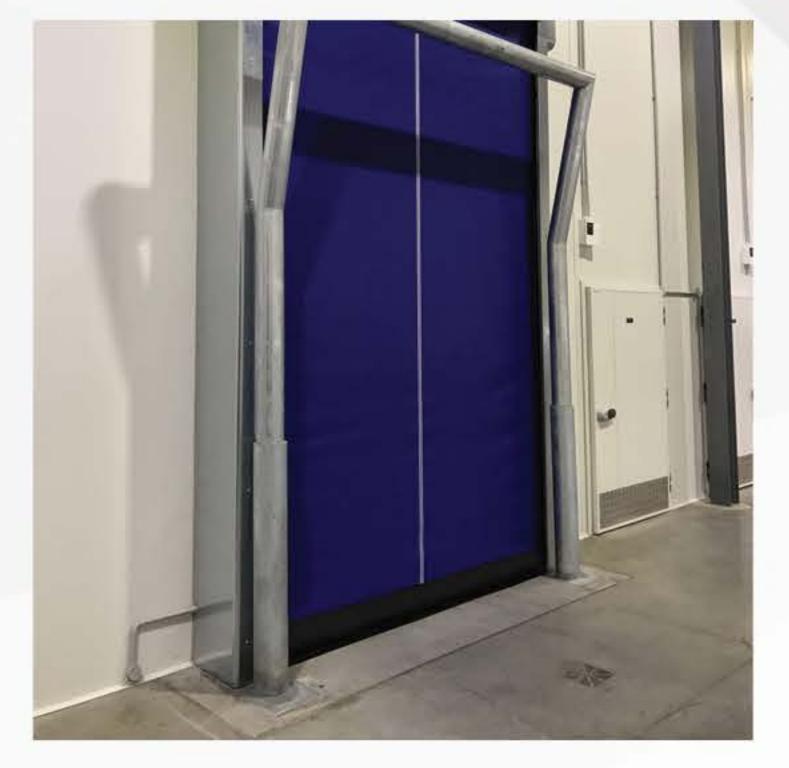



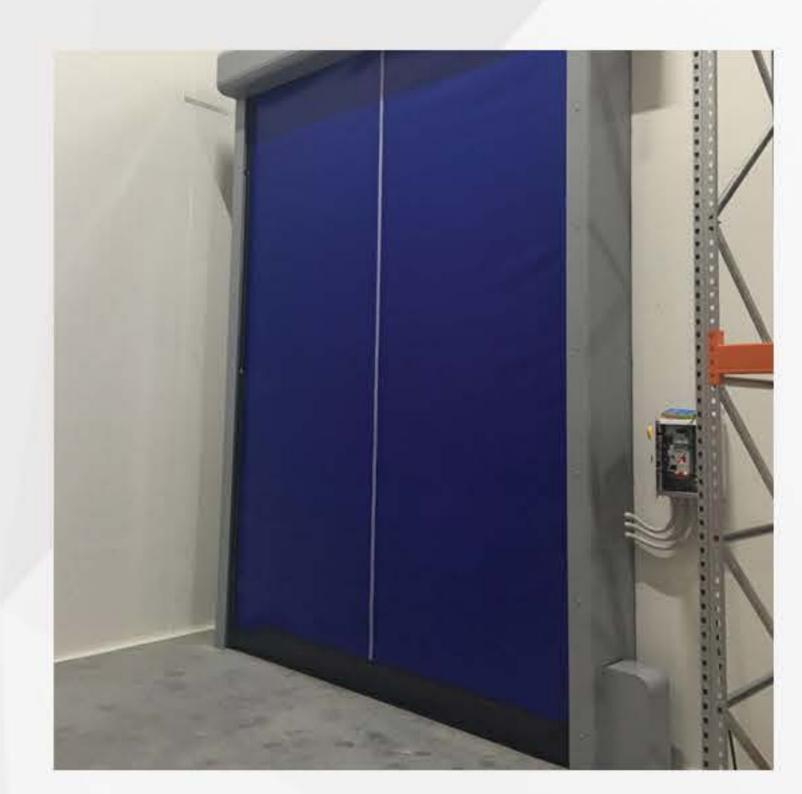

GENERAL SPECIFICATIONS

*EACH COLD STORAGE APPLICATION HAS DIFFERENT REQUIREMENTS. PLEASE CONSULT YOUR PERFORMAX GLOBAL SALES REPRESENTATIVE FOR MORE INFORMATION.

OPENING SPEED Up to 70" per second Up to 32" per second

MAX SIZE 13'x16'

DRIVE Direct Variable Frequency Drive

CURTAIN Double Vinyl Curtain with Air Gap

CURTAIN THICKNESS 1/16" each

GUIDES 5.3" Galvanized Guides

Optional: Powder coated aluminum, AISI 304

stainless steel or AISI 316 stainless steel

SAFETY DEVICES Infrared Photo Eye, Resistive Wireless

Safety Edge

MECHANICAL Hood & Motor Cover Standard

ELECTRICAL

460 Volt / 3 Phase / 60 Hz 230 Volt / 3 Phase / 60 Hz 208 Volt / 3 Phase / 60 Hz

Separate 120 Volt

ELECTRICAL (Heaters)

OPERATING TEMPERATURE
STANDARD HEATING SYSTEMS

ACTIVATION DEVICE OPTIONS

Internal Heated Blower, Heated Guides
Floor Loops, Motion Sensors, Pull Cord, Push

70F Variance, Minimum Operating Temp -20F

Buttons

CURTAIN COLORS

Orange Standard; Other Colors Available Upon

Request

APPLICATIONS Food & Beverage, Pharmaceuticals, Cold Storage,

Blast Freezers